

# DENKA POWER CSA TYPE-S

High Performance, Shrinkage Reducing and Compensating Additive

## Description

DENKA POWER CSA TYPE-S is a high performance additive for the compensation and reduction of shrinkage for concrete and mortar. Its functional mechanism is based on our cutting edge technology which we have developed for long years. POWER CSA TYPE-S has good cost performance as well.

## Advantages

- Minimize the cracking caused by drying shrinkage (Shrinkage compensation)
- Increase water tightness
- Cost effective

## Applications

- Dry mix mortar to minimize cracking due to dry shrinkage
- Ready-mixed concrete to minimize cracking due to dry shrinkage and improve water tightness

## Packaging

- 20kg paper bags
- 1,000kg bulk bags

## Properties

### Chemical Composition

Ignition-loss(%)	3 or less
Insolubility (%)	1.5
SiO <sub>2</sub> (%)	1.2
Al <sub>2</sub> O <sub>3</sub> (%)	5.0
Fe <sub>2</sub> O <sub>3</sub> (%)	1.2
MgO (%)	0.9
SO <sub>3</sub> (%)	19.5
CaO (%)	69.5
f-CaO (%)	50.0
Alkali content (%)	0.75 or less
Chloride ion (%)	0.05 or less

### Physical Properties



Appearance	White powder
Physical state	Solid
Odour	Odorless
Specific gravity*	3.10
Blaine fineness*	2000 or more g/cm <sup>2</sup>
Bulk density	1.12
pH	12.5 (Dissolved water)
Water solubility	Partially soluble in water. Will solidify over a period of hours if moistened or wet

※Typical Data

RESULTS MAY DIFFER BASED UPON STATISTICAL VARIATIONS, DEPENDING UPON MIXING METHODS AND EQUIPMENT, TEMPERATURE, APPLICATION METHODS, TEST METHODS, ACTUAL SITE CONDITIONS AND CURING CONDITIONS.

# Denka

<http://www.denka.co.jp/eng/>

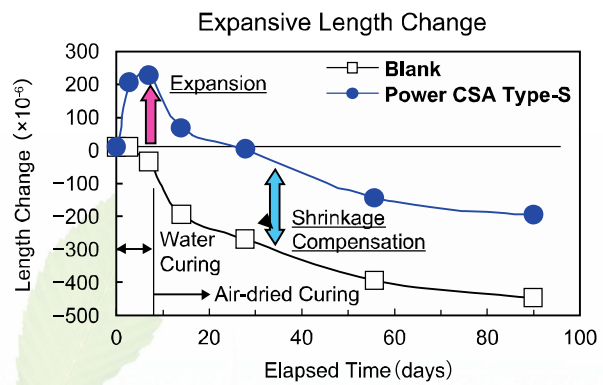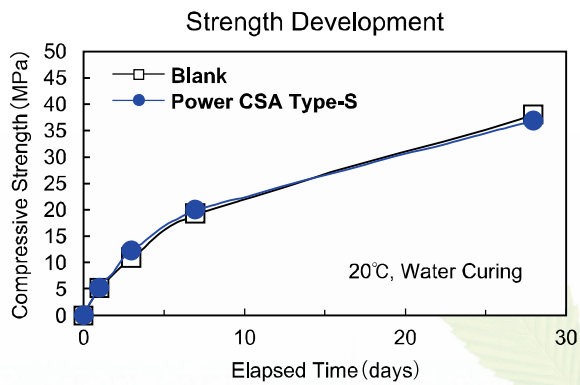

#### Concrete Mix Proportion

Ordinary Portland Cement	: 320kg/m <sup>3</sup>
Power CSA Type-S	: 20kg/m <sup>3</sup>
W/(cement+ P-CSA)	: 55.0%
Sand-Aggregate ratio	: 45.5%

## Precautions for handling

- Refer to Material Safety Data Sheet (MSDS) before use.
- Use a stainless steel or iron agitating blade. Do not use an aluminum blade because hydrogen gas generation could occur and subsequently lead to explosions when mixing the mortar
- Mix grouting material with the specified quantity of water. Using other quantities of water may affect the performance of the non-shrinking mortar
- Use fresh water that does not contain oils, salts, or organic compounds
- Before beginning injecting work, optimize the quantity water in mixing trials and remove oily residues, laitance, and mud from the surface of structure
- Protective gear (goggles, mask, gloves, and rubber boots) should be worn during handling
- Do not dispose of DENKA Power CSA T-S in drains
- Product in open bags should be used up completely or the bag should be resealed for storage
- The product should be stored in a dry area, indoors, and out of direct sunlight
- For further information, please contact DENKA.

## Limitation of liability

- The information contained in this document is general advice for potential customers of DENKA about the basic properties and characteristics of various DENKA products (hereafter referred to as "the Product Information"). DENKA makes no warranty or representation as to the entire accuracy or completeness of the Product Information in this brochure.
- Nothing in this brochure will be deemed to create any express or implied warranty or obligation of DENKA with respect to the Product Information or its use, including, but not limited to, any warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property rights.
- Each user of the Product Information and DENKA products assumes their own responsibility to properly determine the manner and suitability of use of the Product Information and DENKA products in its own operations. The user should exercise proper care in considering the Material Safety Data Sheet, Product Information and any other technical information provided by DENKA, including descriptions of conditions of use, warnings, and cautionary instructions.
- DENKA reserves the right to change the Product Information from time to time at its discretion and without notice.

**Denka**  
<http://www.denka.co.jp/eng/>

**DENKI KAGAKU KOGYO K.K.**  
 Special Cement Additives Department  
 TEL: +81-3-3507-5465 FAX: +81-3-3507-5085

**-China-**  
**DENKA INFRASTRUCTURE TECHNOLOGIES SHANGHAI**  
 ROOM 2807, NEW HONGQIAO CENTER BLDG  
 NO.83 LOUSHANGUAN RD, CHANG NING AREA, SHANGHAI CHINA  
 TEL: +86-21-6236-5510  
 FAX: +86-21-6236-5505

**-Asia-**  
**DENKA INFRASTRUCTURE TECHNOLOGIES PTE LTD**  
 4 SHENTON WAY #29-02 SGX CENTRE 2 SINGAPORE 068807  
 TEL:+65-6216-0580  
 FAX:+65-6224-3840

**-Europe-**  
**DENKA CHEMICALS GMBH**  
 WEHRHAHN-CENTER, CANTADOR STR.3, DUSSELDORF, GERMANY  
 TEL: +49-211-130990  
 FAX: +49-211-329942